







The EBELCO 600 series electromagnetic lock are renown with its excellent holding force and remarkable features.

The series compliance to CE and product are manufactured under the highest quality control to achieve the commitment to customer who always satisfied with the maximum quality and reliability.



► Voltage Input: 12 VDC / 24VDC


► Current Draw : 12V @ 510mA x2 (±5%);


24V @ 285mA x2 (±5%)


- ► Holding Force: Up to 600 lbs x2 (272 kg x2)
- ► Hall Effect Contact : SPDT rated 2A at 24 VDC
- ▶ Magnetic Contact Rating: 28 VDC, 0.5A, 10W
- ► Anti-Rust Surface Treatment : Blue Zinc Plating
- ► Operating Temperature : 0~55° C (32~131° F)
- ► Operating Humidity : 0~95% (non condensing)
- ▶ Weight (Magnet): 2.2 kg (±1%)
- ► Dimensions : Magnet (L)500x(W)42x(T)25 mm
- ► Armature (L)180x(W)38x(T)11 mm



- ➤ Dual Voltage Selectable (12 VDC or 24 VDC)
- ► Selectable Re-locking Timer 5,10,15,25 Sec
- ► Built-in EXIT Push Switch
- ► Low Current Consumption
- ► Reliable Holding Force
- ▶ Hall Effect Sensor Monitoring Output
- ▶ Green/Red LED Indication for EM Lock Status
- ► Built-in Mag. Contact for Door Status Monitoring
- ▶ Durable and Silence Operation
- ▶ Cosmetic Anodized Aluminum Casing
- ► Surge & Spike Protection PCB
- ► Anti-Tamper Jam Nuts
- ► Full Range of Optional Brackets
- ▶ Anti Residual Magnetism Kick Off Button

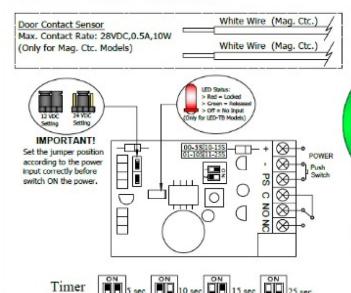





EM LOCK ENERGIZED

Disclaimer:

EBELCO reserve the right to go ahead with any modifications of models or features or price without prior forewarning.

All the information and specifications stated in this document are current at the time of publication.

SECURITY . QUALITY . RELIABILITY

EBELCO INDUSTRIES SDN. BHD.