



Touchless - NO Touch Exit Buttons

HEAVY-DUTY FLAT  
SS-304 PLATE -2 MM

Dimensions : American Size  
ANSI Standard

Multi-Voltage Input : 12-24 vdc

Models :

- Sek-1200-NT ( Momentary Signal )
- Sek-1200-NT-Timer (Adjustable Timer )
- Sek-1200-NT- T-D  
(Adjustable Timer and Distance )

Led Color Change on  
Waving of Hand




Fast Response & Higher Detection Range

Detection range Adjustable from 4 cm to 15mm

### Specification

- Size: 114 mm by 70 mm
- Standard Structure: Steel Button
- Current Rating: 3A@36VDC Max
- Output Contact: NO/NC/COM
- Mechanical Life: 500000 tested
- Suitable for Door: Hollow Door
- Operating temp: 10~+55°C(14-131F)
- Operating Humidity: 0-95%(relative humidity)
- Weight: 0.23kg
- Actual Product might look Slightly different from Photos shown above

### Wiring Diagram

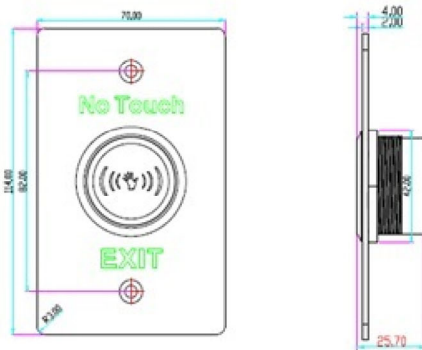

### Led Detection Behaviour

- LED Indicator:
  - White LED indicator: Power OFF
  - Red LED indicator: Power ON(standby)
  - Green LED indicator: Power ON(sensation)

### Installation

Detection range: 4-15 cm(Adjustable)

Time delay:0.5S~25S

