

Emergency On-Off Key-Switch in SS -304 Plate

DPDT Double Pole

Model No. : Sek-300-KY-DPDT-A

Model No. : Sek-300-KY-DPDT-B



Double Pole Contacts


(Plz Choose A or B as per your Requirements)

- a) NO + C & NO + C
- b) NO + C & NC + C


Wide Options & Variations Available : Momentary , On-Off , SPDT , DPDT , Inbuilt Timer Relay , With Tamper Output, Inbuilt DMS (Door Monitoring)

Double Pole Contacts

MODEL NO.	NO. POLES	Connected Terminals		Key Pull Positions	Lock Configuration	Indexing
		POS. 1	POS. 2			
S-19-03-102	DOUBLE	1-2	3-4	Positions 1&2		90°

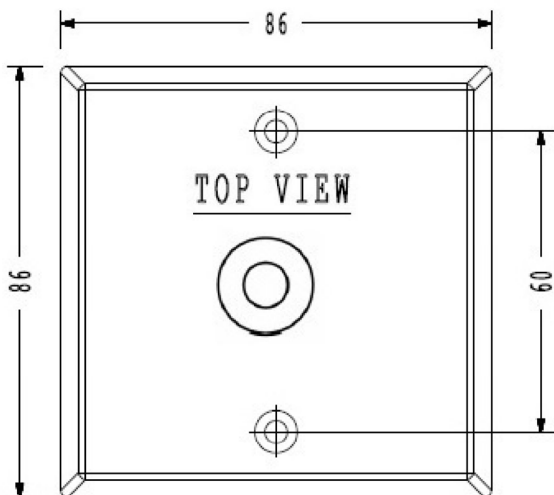

Drawing and Connection Terminals

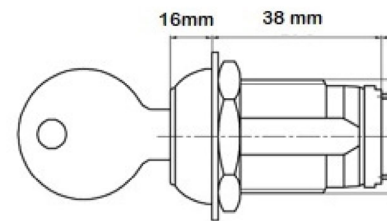

Electrical & Mechanical Properties

No.	Items	Technical conditions	Technical requirements
5.1.	Rating load	125V AC 250V AC 28V DC	4A 2A 4A
5.2	Withstand Voltage	AC 1000V(50 Hz) 1min 2mA	No abnormality, no breakdown,no over arc.
5.3	Contact resistance	All terminals will be test but not include Socket ground pin and swtch part.	≤20mΩ
5.4	Insulation resistance	Test voltage:500V DC 1min± 5s. 500V DC 1 min ± 5 Test position:Between all terminals between terminals and base	≥100MΩ 500V DC
5.5	Mechanical life	Inserting and extracting 10000times min.	

