



SEKURIT Universal Stopper

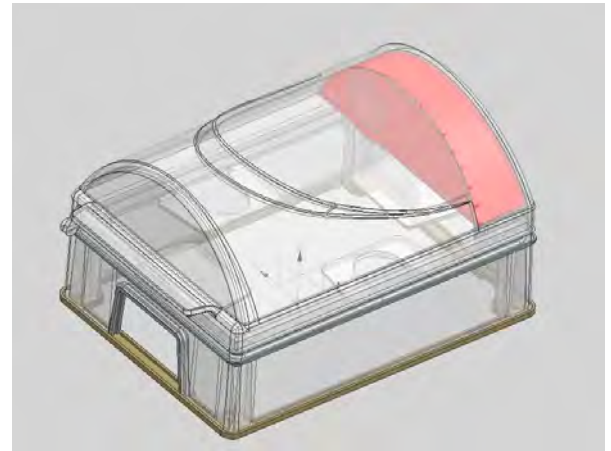

Optional Multiple Gaskets upto 7 no.'s for Outdoor Installation

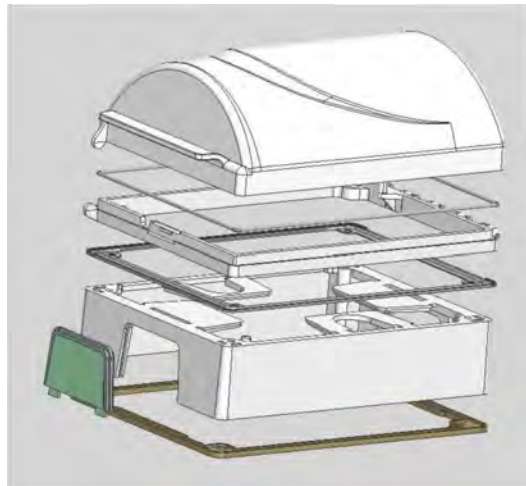

PRODUCT OVERVIEW

These indoor and outdoor low profile or dome polycarbonate covers protect devices such as manual call points, emergency buttons and dual action pull stations etc., without restricting legitimate operation. The versatile cover offers excellent protection against physical damage (both accidental and intentional), dust and grime as well as severe environments inside and out.

IMPORTANT NOTICE

When used on fire systems, Universal Stopper is intended for areas where the incidence of false fire alarms from manual call points is high or has proven to be a serious problem. Any disadvantage of the device is more than balanced when one considers the consequences of false fire alarms, especially if fire service personnel and equipment are responding to a false fire alarm when they are needed for a real fire somewhere else. Add to this the disruption to the facility when false alarms occur. If you have, or may have, a problem with false fire alarms or physical/weather damage to your fire alarm activation devices, the Universal Stopper could prove invaluable.

KEY FEATURES

General Information

- These indoor and outdoor low profile or dome polycarbonate covers can protect a variety of devices without restricting legitimate operation.
- Three year guarantee against breakage of polycarbonate in normal use (one year on electromechanical and electronic components).

Design

- Prevents false alarms, without hindering legitimate operation of a manual call point in the event of an emergency.

Construction

- Tough polycarbonate housing can withstand severest of knocks.

Installation

- A simple 4 fixing installation can retrofit over existing device.
- Can accommodate flush or surface mount applications.
- Typical working properties of polycarbonate are -40° to 121°C (-40° to 250°F).

Electronics

- **Optional** Available with or without a 96 dB integral sounder, powered by a 9V PP3 battery. The sounder draws immediate attention to the area.
- Optional 12-24 VDC powered units.

Options

- Optional breakseals are available for added security.
- Available in a range of colours.
- Custom labelling available.

Sekurit Universal Stopper

Dimensions and Technical Information

MODELS AVAILABLE

SEK-4000-PC-TP TOP PART - RECESSED FITTING : Universal Stopper, (flush mounted, dome cover)

SEK-4000-PC-SF SURFACE MOUNT : Universal Stopper, (flush mounted, dome cover with back spacer)

SEK-4000-PC-SF-WP: Universal Stopper, (flush mounted, dome cover with back spacer AND WEATHERPROOF GASKETS

optiona; : Alarm MODULE

BUILD YOUR OWN MODEL

Cover Options:
3 = Dome cover

Mounting Options:
0 = Flush Mount (Open backed) -
1 = Surface Mount - Clear Spacer (Dual Mount - Open backed) -

Hood/Horn Options:
00 = No Label hood
10 = Label hood without sounder ★
20 = Label hood with sounder ★
30 = Label hood with sounder and relay ★
★ All colours except NC


Housing/Sounder Colour & Label Options:
FR (red) - IN CASE OF FIRE - LIFT COVER / ACTIVATE FIRE ALARM
FR-BREAK (red) - IN CASE OF FIRE - LIFT COVER / BREAK GLASS
FR-PULL (red) - IN CASE OF FIRE - LIFT COVER / PULL FIRE ALARM
EG (green) - IN CASE OF EMERGENCY - LIFT COVER / BREAK GLASS TO OPEN DOOR

<p>No Label NB = Blue NC = Clear NG = Green NR = Red NW = White NY = Yellow</p>	<p>Custom Label CB = Blue CG = Green CR = Red CW = White CY = Yellow</p>	<p>For custom label option, must provide wording (2 lines, 30 characters per line including spaces limit)</p>
--	---	---

Language Options:

-KA	KANNADA	-TA	TAMIL;
-ES	Spanish	-HI	HINDI

No additional coding is required for an English label

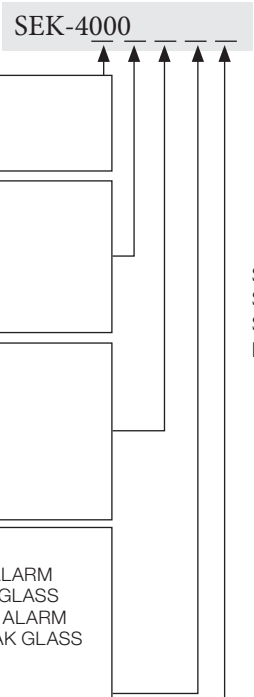


back) with sounder, with emergency exit label
PLEASE REFER TO BUILD YOUR OWN MODEL TO GENERATE OVER 500 VARIATIONS OF THIS PRODUCT

ACCESSORIES:

- SEK-4000-SPACER 37mm Spacer
- SEK-PIN Servicing Pin
- SEK-Alarm Sounder Unit
- BS Break Seals (Quantity. 10)


Replacement Housing Shell (Red)
Add -G for Green, -B for Blue, -Y for Yellow,

DIMENSIONS:

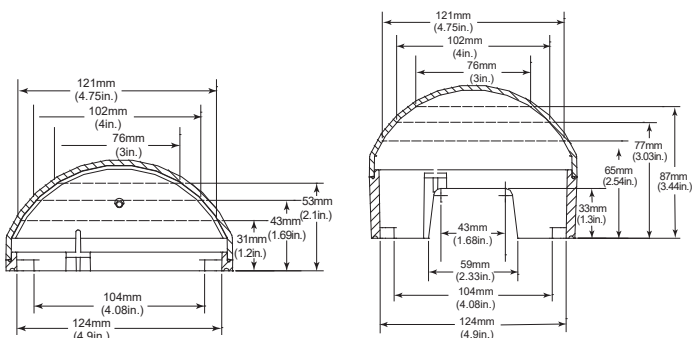

EXTERNAL DIMENSIONS (mm):

Mounting Option	Height	Width	Depth
Flush	207	137	68
Surface	207	137	105

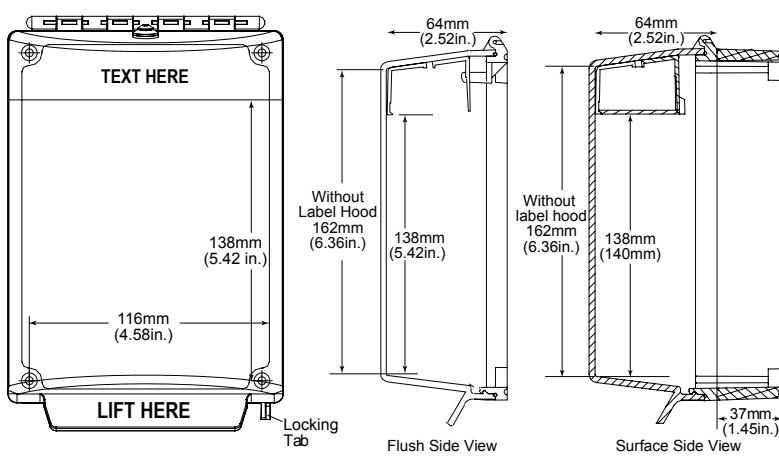

OPTIONAL BACK SPACER
SEK-4000-PC-TP TOP PART RECESSED



OPTIONAL GASKETS

