

NOVA-1 Series
12 VDC ONLY

NOVA-2 Series
12-24 VDC (Jumper Settings)

NOVA SERIES OF LOCK :

SIMPLE AND EASY INSTALLATION

SUITABLE FOR 600 LBS AND 1200 LBS LOCKS



Nova-1 -600-led (12 vdc)
Nova-2- 600-led (12-24 vdc)

- **Holding Force** : Up to 600 lbs
- **Weight (Magnet)** : 1.1 kg (±1%)
- **Dimensions** : Magnet - (L)250x(W)42x(T)25 mm
Armature - (L)180x(W)38x(T)11 mm
- **Anti Residual Magnetism Kick Off Button**
- **Current Draw** : 12V /550 mA ; 24V /320 mA (±5%)

Nova-1 -1200-led (12 vdc)
Nova-2- 1200-led (12-24 vdc)

- **Holding Force** : Up to 1200 lbs
- **Weight (Magnet)** : 2.5 kg (±1%)
- **Dimensions** : Magnet - (L)266x(W)67x(T)39 mm
Armature - (L)185x(W)61x(T)16.5 mm
- **Anti Residual Magnetism Kick Off Button**
- **Current Draw** : 12V /550 mA ; 24V /320 mA (±5%)



Technical Specs :

Standby Current without lock:

- 65mA to 75mA @12VDC
- 60mA to 70mA @24VDC

Lock Output : 0.8A to 0.85A @12/24VDC


Dual voltage 12/24VDC

MOV prevents voltage spike and surge current


No residual magnetism

LED output voltage 20mA 9-10 VDC

Nova-2 series (12-24 vdc)

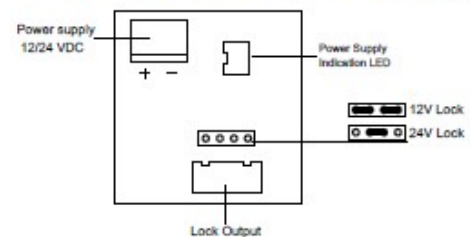

Nova-1 series (12 vdc)

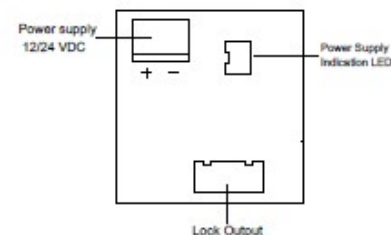

Manufacturer : SekurityXchange

NOVA -TIMER SERIES

Programmable Relock Timer

NOVA SERIES OF LOCK :

SIMPLE AND EASY INSTALLATION

SUITABLE FOR 600 LBS AND 1200 LBS LOCKS



Nova-Timer - 600-led (12-24 vdc)

- **Holding Force** : Up to 600 lbs
- **Weight (Magnet)** : 1.1 kg (±1%)
- **Dimensions** : Magnet - (L)250x(W)42x(T)25 mm
Armature - (L)180x(W)38x(T)11 mm
- **Anti Residual Magnetism Kick Off Button**
- **Current Draw** : 12V /550 mA ; 24V /320 mA (±5%)

Nova-Timer - 1200-led (12-24 vdc)

- **Holding Force** : Up to 1200 lbs
- **Weight (Magnet)** : 2.5 kg (±1%)
- **Dimensions** : Magnet - (L)266x(W)67x(T)39 mm
Armature - (L)185x(W)61x(T)16.5 mm
- **Anti Residual Magnetism Kick Off Button**
- **Current Draw** : 12V /550 mA ; 24V /320 mA (±5%)

Technical Specs :

Standby Current without lock:

- 65mA to 75mA @12VDC
- 60mA to 70mA @24VDC


Lock Output : 0.8A to 0.85A @12/24VDC

Dual voltage 12/24VDC

MOV prevents voltage spike and surge current

No residual magnetism

LED output voltage 20mA 9-10 VDC

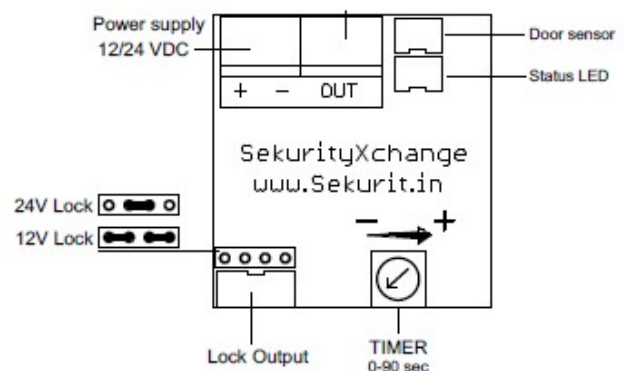

Manufacturer : SecurityXchange